

GENSPRO®


LITHIUM-G300 BATTERY PORTABLE POWER SUPPLY



ShenzhenJinShipengTechnologyCo.,Ltd.


Company Profile

Shenzhen Jinshipeng Technology Co., Ltd. was established in 2013. At present, it mainly develops and produces energy-saving and environmental protection products such as mobile energy storage power supply, portable energy storage power supply, lithium battery UPS backup power supply, solar energy charging system and solar emergency mobile power supply. The company employs a senior R&D director who has been engaged in power R&D for 20 years with high salary to form a R&D team. Based on the experience of power supply application, several multi-level intelligent power supply products have been developed. The products have passed CE, FCC, ROHS, PSE certification. The company now has 2000 square meters of modern production base, ISO 9001 management process, to ensure that each of our products can meet customer quality requirements. Jin Shipeng adheres to the business philosophy of "innovation, pragmatism, efficiency and win-win", adhering to the business philosophy of "market-oriented, quality-oriented, life-oriented, management-guaranteed", welcoming customers with excellent product quality, and maintaining customers with reputation!

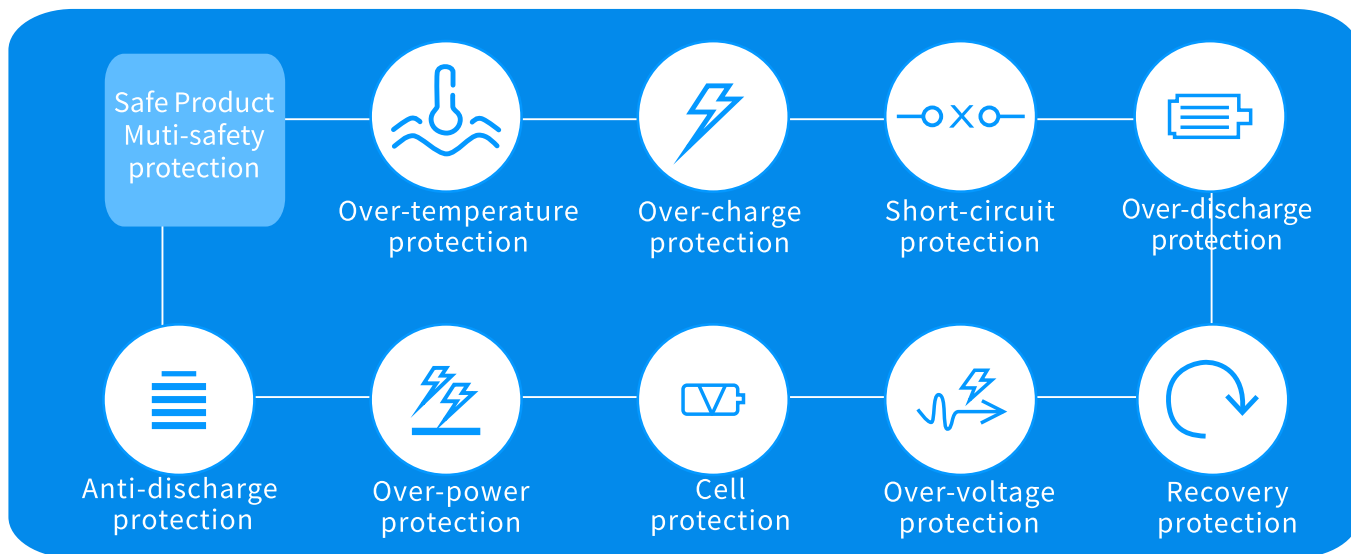

G300(Lithium-ion type)

Portable mobile energy storage power supply

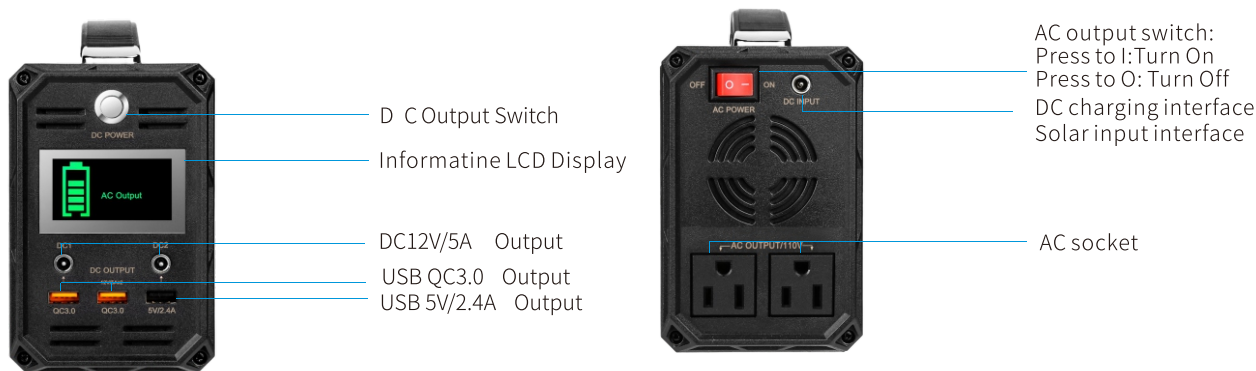

(Can be customized according to requirements AC110V/AC220V)

Areas of Application



Outdoors camping



Emergency rescue



Family reserve



Outdoor photography



Unmanned aerial vehicle




Night market stall

Product Parameters

Product model: G300 (lithium battery) Portable power station	
System storage capacity (battery capacity):222Wh	
AC output	Peak power: 350W
	Rated power: 300W
	Standard output voltage: 110V/230V
	Standard output voltage: 50/60Hz
	Static consumption: <5W
	Maximum efficiency (> 70% load): 92%
DC output	2xDC 9-12.6V/10A(Max)
USB	2xQC3.0; 5V/2.4A
Solar Charging	Maximum input power: 60W
	Input voltage range: 18V-24V
Specification	Charging time: DC15V/4A:5~6hours
	Working temperature: -10°C~40°C
	Cycle life: >800次
	Cooling method: air cooling and heat dissipation
	Appearance size: L:248*W86*H:151 (mm)
	Package size: L:340*W:130*H:200 (mm)
	Net weight: 2.6kg
	Gross weight: 3.25kg

Note: Accessories may be different depend on actual modles.


Product Specification



American standard




Japanese standard



Universal gauge

Charging Mode

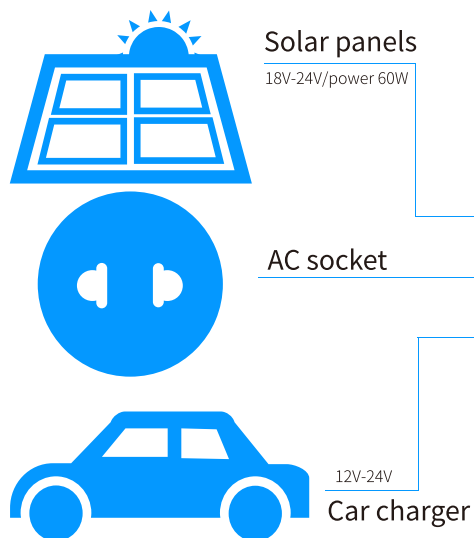

Product features

Appearance Patents•
Exclusive Private Model





Join us

Looking for sales agents around the Global,
More quantity,Better Price!



Address: Room 819 Juntaihao Business Center, 120 Yongfu Road, Fuhai Street,
Baoan District, Shenzhen

Contact number: Mr. Jin 13632847865 (WeChatnumber)

Website:<https://www.genspro.cn>